

From the INTERNATIONAL BUREAU

**PCT**NOTIFICATION CONCERNING  
SUBMISSION OR TRANSMITTAL  
OF PRIORITY DOCUMENT

(PCT Administrative Instructions, Section 411)

To:

PITCHFORD, James, Edward  
Marks & Clerk  
45 Grosvenor Road  
St Albans AL1 3AW  
ROYAUME-UNI

Date of mailing (day/month/year) 23 February 2005 (23.02.2005)	
Applicant's or agent's file reference PA 5112 PCT.INT	<b>IMPORTANT NOTIFICATION</b>
International application No. PCT/GB04/004113	International filing date (day/month/year) 29 September 2004 (29.09.2004)
International publication date (day/month/year)	Priority date (day/month/year) 29 September 2003 (29.09.2003)
Applicant	RUTHERFORD, Stephen, Graham et al

- By means of this Form, which replaces any previously issued notification concerning submission or transmittal of priority documents, the applicant is hereby notified of the date of receipt by the International Bureau of the priority document(s) relating to all earlier application(s) whose priority is claimed. Unless otherwise indicated by the letters "NR", in the right-hand column or by an asterisk appearing next to a date of receipt, the priority document concerned was submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b).
- (If applicable)* The letters "NR" appearing in the right-hand column denote a priority document which, on the date of mailing of this Form, had not yet been received by the International Bureau under Rule 17.1(a) or (b). Where, under Rule 17.1(a), the priority document must be submitted by the applicant to the receiving Office or the International Bureau, but the applicant fails to submit the priority document within the applicable time limit under that Rule, the attention of the applicant is directed to Rule 17.1(c) which provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.
- (If applicable)* An asterisk (\*) appearing next to a date of receipt, in the right-hand column, denotes a priority document submitted or transmitted to the International Bureau but not in compliance with Rule 17.1(a) or (b) (the priority document was received after the time limit prescribed in Rule 17.1(a) or the request to prepare and transmit the priority document was submitted to the receiving Office after the applicable time limit under Rule 17.1(b)). Even though the priority document was not furnished in compliance with Rule 17.1(a) or (b), the International Bureau will nevertheless transmit a copy of the document to the designated Offices, for their consideration. In case such a copy is not accepted by the designated Office as the priority document, Rule 17.1(c) provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.

<u>Priority date</u>	<u>Priority application No.</u>	<u>Country or regional Office or PCT receiving Office</u>	<u>Date of receipt of priority document</u>
29 September 2003 (29.09.2003)	0322740.2	GB	11 November 2004 (11.11.2004)
30 October 2003 (30.10.2003)	0325294.7	GB	21 February 2005 (21.02.2005)
16 June 2004 (16.06.2004)	0413471.4	GB	25 November 2004 (25.11.2004)

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland	Authorized officer  <b>Boccard Paulette</b>
Facsimile No. +41 22 740 14 35	Facsimile No. +41 22 338 87 40 Telephone No. +41 22 338 8147

10/574/64

X

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB04/004113

International filing date: 29 September 2004 (29.09.2004)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0325294.7  
Filing date: 30 October 2003 (30.10.2003)

Date of receipt at the International Bureau: 21 February 2005 (21.02.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 10 February 2005

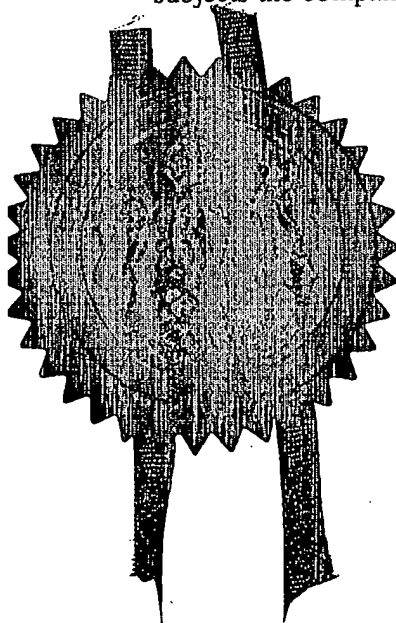

The  
Patent  
Office30 OCT 03 08:24:51 D00790  
P01/7700-0:00-0325294.7THE PATENT OFFICE  
L  
30 OCT 2003  
NEWPORT

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

1. Your reference

PA 4958

30 OCT 2003

2. Patent application number

*(The Patent Office will fill in this part)*

0325294.7

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*Stephen Graham RUTHERFORD  
34 Kilncroft  
Hemel Hempstead  
Hertfordshire  
HP3 8HH  
United KingdomJames Harold JOHNS  
17 Purcell Way  
Sheffield  
Bedfordshire  
SG17 5RY  
United KingdomPatents ADP number *(if you know it)*

If the applicant is a corporate body, give the country/state of its incorporation

1297712002

8722373001

4. Title of the invention

IMPROVED PLATTER

5. Name of your agent *(if you have one)*

SOMMERVILLE &amp; RUSHTON

"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*45 Grosvenor Road  
St Albans  
Herts AL1 3AWPatents ADP number *(if you know it)*

1511001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country

Priority application number  
*(if you know it)*Date of filing  
*(day / month / year)*

GB

0322740.2

29/09/2003

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
*(day / month / year)*8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*

No

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form 0  
Description 16  
Claim(s) 5  
Abstract 1  
Drawing(s) 6 + 6

10. If you are also filing any of the following, state how many against each item.

Priority documents 0  
Translations of priority documents 0  
Statement of inventorship and right to grant of a patent (Patents Form 7/77) 0  
Request for preliminary examination and search (Patents Form 9/77) 1  
Request for substantive examination (Patents Form 10/77) 0  
Any other documents (please specify) 0

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

29 October 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

DR JAMES PITCHFORD  
01727 854215

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

# IMPROVED PLATTER

This invention relates to platters for use in ovens. It is particularly applicable, but by no means limited, to platters for use in commercial ovens.

5

## **Background to the Invention**

Forced air / microwave combination ovens are in common usage, and one popular model is the TurboChef C3 oven, supplied by TurboChef Technologies, Inc., of 10500 Metric Drive, Suite 128, Dallas, TX 75243, USA. Such ovens are typically found in petrol stations, motorway service area cafeterias and roadside restaurants, and are used for cooking or defrosting a wide range of foods such as pizzas, hot filled baguettes, lasagne, steak, fish, burgers and pies. The ovens use a combination of rapidly-moving electrically-heated hot air and microwave radiation, and will be referred to herein as forced air / microwave combination ovens. The TurboChef C3 can reach a cooking temperature of 275 °C, and cooks on average at seven times the speed of a conventional oven. The microwave generator is located beneath the oven chamber, and transmits microwave radiation via a waveguide up into the oven chamber. The forced air is delivered from above, into the top of the oven chamber, and is extracted from the bottom of the chamber, beneath the platter. The microwave and hot air modes of cooking food may be used independently or together, and the oven is processor-controlled to run a range of cooking routines using the different cooking modes.

The platter of a forced air / microwave combination oven is located towards the bottom of the cooking chamber, above the microwave generator and microwave waveguide cap. The platter is essentially a shelf on which cookware is placed, the cookware containing the food

to be cooked. The platter contains holes through which forced air passes, and is also microwave-permeable to enable microwave radiation to reach food placed on the platter. Traditionally, such platters are made from a porous ceramic material, and several disadvantages, shortcomings and problems have been identified, as follows:

5

1. *Desire for greater cooking efficiency using forced air*

There is a desire to improve the efficiency of cooking using forced air, and also to reduce the frequency with which high temperature thermal cutout devices trip during service. This in turn would give rise to faster cooking times and more efficient use of energy. The current  
10 forced air cooking performance of such ovens, and the frequency with which the cutout devices trip, is thought to be influenced by the number and distribution of the apertures through the platter. Traditional ceramic platters have a somewhat irregular distribution of apertures, and there are areas in which relatively few apertures are provided. This is thought to limit the airflow and may give rise to undesirable thermal cutout trips in service.  
15 The limited number and irregular distribution of the apertures in traditional platters is thought to be because the ceramic material would be more liable to fracture if more apertures were provided.

Enhanced flow of hot air around and under the cookware on the platter is also desired, to  
20 improve the cooking performance yet further.

2. *Risk of incomplete cooking by microwaves alone*

Although the apertures are distributed across much of the area of a conventional ceramic platter, the microwave radiation used in the oven is concentrated in a specific area in the  
25 centre of the platter. Traditionally, the user has been free to position the food product

anywhere on the platter. However, it will be appreciated that if the food product is to be cooked only by microwave radiation, and not by hot air, then placement of the food off-centre on the platter can result in it not being adequately cooked.

5     3.     *Handling and cleaning problems*

A forced air / microwave combination oven may be in almost continuous use throughout the day, particularly in motorway service areas and the like which are frequented by customers at all hours. Given the nature of the food products that are prepared, the platter can readily become unclean, particularly from cheese and other molten materials that fall from the  
10     cookware and become burnt onto the platter. In a catering environment, food hygiene and cleanliness are of paramount importance, and so the staff that operate the ovens are required to clean them regularly.

Traditionally, platters used in such ovens are made from a porous ceramic material, and chip  
15     easily when being cleaned, due to the inherent brittleness of the ceramic material. Cleaning staff may not be particularly careful when carrying out their job, and this increases the likelihood of chipping or breakage of the ceramic platters. Also, because of their porosity, conventional platters cannot be soaked during cleaning, as this would result in the platter taking in water through the network of pores inherent in the material. Thus, it will be  
20     appreciated that cleaning off the burnt on food products can be very difficult and time consuming to do properly, without soaking the platter. An unconscientious worker may well soak the platter, contrary to instructions, or may simply not clean the platter thoroughly.

A further problem is that, during cooking, food may fall through the platter and onto the  
25     waveguide cap, or elsewhere on the base of the oven chamber beneath the platter. Given



the nature of the food products that are prepared, this area underneath the platter can readily become unclean, particularly from cheese and other molten materials that fall through the platter and become burnt. In a catering environment, food hygiene and cleanliness are of paramount importance, and so the staff that operate the ovens are regularly required to  
5 clean this area under the platter.

To clean the base of the oven chamber requires the oven to be turned off, during which time it could otherwise be used to prepare food for customers. Also, cleaning the base of the oven chamber requires the cleaning operative to work with their hands and arms inside the  
10 oven chamber, which is a confined space and may be hot.

### **Summary of the Invention**

According to a first aspect of the invention there is provided a platter for use in a forced air / microwave combination oven, the platter comprising an upper surface and a lower surface  
15 and incorporating a plurality of apertures passing through the thickness of the platter; wherein one or both of the surfaces of the platter incorporate a recess substantially surrounding at least one of the apertures.

The term "aperture" as used herein should be interpreted broadly, to encompass holes, slits,  
20 slots and other types of openings. Thus, the term "aperture" is intended to encompass both a hole passing through a platter, and an open region in an edge of a platter that passes through the thickness of the platter.

The provision of recesses around the apertures advantageously promotes the flow of air  
25 under cookware placed on the platter.

In a first embodiment, the upper surface is profiled such that each aperture is substantially surrounded by an individual recess.

- 5 Preferably the recess tapers outwards towards the upper surface. This reduces contact between the cookware and the platter, which can facilitate removal of the cookware if the platter is dirty.

- 10 Particularly preferably adjacent tapering recesses meet at common points on the upper surface of the platter, thereby minimising contact between the cookware and the platter, and further facilitating removal of the cookware if the platter is dirty.

- 15 In a second embodiment, the apertures are arranged in an array of rows and columns, and the upper surface is profiled such that a plurality of apertures in a row are together surrounded by an elongate recess extending along said row. The elongate recess may taper outwards towards the upper surface. Such elongate recesses advantageously retain baguettes and long rolls placed directly on the platter, and also provide long unobstructed channels for airflow under the cookware.

- 20 Preferably the lower surface is profiled such that a plurality of apertures in a column are together substantially surrounded by an elongate recess extending along said column. The elongate recess may taper outwards towards the lower surface. This arrangement advantageously provides strength and flexural rigidity to the platter, and prevents undesirable flexing in use.

25

Either embodiment may optionally further incorporate an indentation shaped to receive an item of cookware, the indentation being positioned to align the cookware with microwave radiation in the oven in use. This advantageously ensures that food in cookware placed in the indentation is optimally exposed to microwave radiation, which is particularly important if only microwaving (and not hot air) is being used in a given cooking program.

The term "indentation" as used in this context should be interpreted broadly, to encompass any change in surface profile adapted to receive an item of cookware. Thus, an annulus or other protrusions that rise from the surface of the platter and which are adapted to receive an item of cookware, function in essentially the same way as an indentation and should be treated as such.

With either embodiment, the apertures may be distributed over substantially the entire surface area of the platter. This promotes airflow around the oven and provides a more extensive cooking area, and is also less likely to impede the flow of hot air which can often be the cause of the oven cutting out or tripping.

According to a second aspect of the invention there is provided a platter for use in an oven, the platter comprising: a central region substantially devoid of apertures, and one or more apertures at substantially the edge of the platter, said one or more apertures passing through the thickness of the platter.

By providing a central region substantially devoid of apertures, and by positioning the apertures at substantially the edge of the platter, this provides the advantage that food matter is prevented or at least impeded from passing through the holes in the aperture and

onto the base of the oven chamber. A dirty platter may be quickly taken out and replaced by a clean one, thereby enabling a commercial oven to continue being used without needing to spend time cleaning the base of the oven chamber.

- 5 Preferably said one or more apertures are positioned at the edge of the platter and are open-sided. Particularly preferably the platter further comprises one or more raised edge members around the perimeter of the platter for retaining food debris in use. By positioning open-sided apertures at the edge of the platter, a raised edge member may be provided around the entire perimeter of the platter, thereby minimising the likelihood of food debris
- 10 falling onto the base of the oven chamber during cooking.

The platter may further comprise means for attaching a handle, or handle means.

- With both the first and second aspects of the invention, preferably the platter is made of a
- 15 polymer material, particularly preferably a liquid crystal polymer resin reinforced with glass, such as DuPont (RTM) Zenite (RTM) 7130. Advantageously, such materials are easy to clean and may be soaked in water without detriment.

- According to a third aspect of the invention there is provided a platter for use in a forced air /
- 20 microwave combination oven, wherein the platter incorporates an indentation shaped to receive an item of cookware, the indentation being positioned to align the cookware with microwave radiation in the oven in use.

According to a fourth aspect of the invention there is provided a platter for use in a forced air / microwave combination oven, the platter incorporating apertures distributed over substantially the entire surface area of the platter.

- 5 According to a fifth aspect of the invention there is provided a platter for use in an oven, the platter being made of a polymer material. Preferably the polymer material is a liquid crystal polymer resin reinforced with glass. Particularly preferably the platter is made of DuPont (RTM) Zenite (RTM) 7130.
- 10 According to a sixth aspect of the invention there is provided an oven having a platter in accordance with any of the first, second, third, fourth or fifth aspects of the invention.

- According to a seventh aspect of the invention there is provided a method of cooking using an oven having a platter in accordance with any of the first, second, third, fourth or fifth
- 15 aspects of the invention.

#### **Brief Description of the Drawings**

Embodiments of the invention will now be described, by way of example, and with reference to the drawings in which:

- 20 Figure 1 illustrates a forced air / microwave combination oven, indicating the position of the microwave waveguide and platter in use, and showing a prior art platter;
- Figure 2 illustrates a first embodiment of an improved platter;
- Figure 3 shows a close-up view of part of a platter in accordance with the first embodiment;
- Figure 4 shows a variant of the first embodiment;

Figure 5 illustrates plan and side elevations of a second embodiment of an improved platter, without a central indentation;

Figure 6 illustrates plan and side elevations of the second embodiment, with a central indentation to receive an item of cookware in use, and example dimensions; and

- 5 Figure 7 illustrates plan and side elevations of a third embodiment of a platter, also with example dimensions.

The dimensions in Figures 6 and 7 are provided by way of example only, as the products may be made in a variety of shapes and sizes.

10

#### **Detailed Description of Preferred Embodiments**

The present embodiments represent the best ways known to the applicant of putting the invention into practice. However they are not the only ways in which this can be achieved.

- 15 By way of background, Figure 1 shows an example of a TurboChef C3 forced air / microwave combination oven 10. The oven measures approximately 550 mm high, 740 mm wide, and 820 mm from front to back. The microwave waveguide 14 is situated at the base of the cooking chamber, and is covered by a waveguide cap 16. The platter 12 is then located on a pair of support rails 18, above the waveguide cap.

20

Traditional platters are made from porous ceramic material, and consequently cannot readily be formed into intricate shapes. As Figure 1 shows, a traditional platter 12 is essentially a flat plate having a number of protrusions rising from the upper surface to support an article of cookware placed thereon. The protrusions are elongated with flat tops, and radiate from the

centre of the platter. Some apertures are provided between the protrusions in the central region of the platter.

The embodiments of the invention that will now be described are presently preferably made  
5 from DuPont (RTM) Zenite (RTM) 7130, a liquid crystal polymer resin reinforced with 30%  
glass that is able to withstand temperatures of up to 289 °C, which is well in excess of the  
maximum operating temperature of the TurboChef C3 oven. This material is well suited to  
injection moulding, thereby enabling the intricate shapes of platters described herein to be  
readily formed. Highly advantageously, and in marked contrast to traditional porous ceramic  
10 platters, a resin platter can easily be cleaned without risk of brittle failure or chipping, and  
can be soaked in water without detriment. This enables better hygiene and levels of  
cleanliness to be maintained.

Other materials suitable for use in a forced air / microwave combination oven may be used  
15 instead of DuPont (RTM) Zenite (RTM), and the present disclosure is intended to apply to  
and encompass all suitable materials already in existence and those which have yet to be  
discovered or developed, such as advanced engineering polymers, glasses, ceramics and  
composite materials. For example, DuPont (RTM) Thermx (RTM), a high performance  
polyester, may be used as an alternative to Zenite (RTM).

20

Turning now to a first embodiment of the invention, Figure 2 shows a platter 20 incorporating  
an extensive array of holes or apertures 21, 22 passing through the thickness of the platter.  
The provision of an array of apertures as shown in Figure 2 is to be contrasted with the  
limited number of apertures provided in a traditional ceramic platter. It is believed that an  
25 extensive array of apertures as shown in Figure 2 would not be favoured with a traditional

ceramic platter, since such an array would be likely to promote fracture of the ceramic platter, with the array of holes behaving effectively as perforations and defining lines along which the platter would readily break. With the use of an engineering polymer, however, such an array may be readily formed and the platter is not prone to brittle fracture.

5

The apertures in the platter enable forced hot air to pass through during cooking. By providing a more extensive array of apertures than in traditional platters, the present embodiment of the invention provides a more extensive cooking area through which the hot air passes, and is also less likely to impede the flow of hot air, which can often be the cause  
10 of the oven cutting out or tripping.

The upper surface of the platter 20 is profiled such that the majority of apertures are each located within an individual recess 24. These recesses taper upwardly outwards, from the edge of each aperture, to join the upper surface of the platter. As shown in Figure 2, these  
15 tapers preferably meet at common points 26. Items of cookware are then supported on the pointed crests 26. This undulating surface profile provides a number of benefits and advantages to the performance of the oven. Firstly, by placing flat-bottomed cookware on the pointed crests 26, horizontal channels are formed between the underside of the cookware and the upper surface of the platter. Hot air can pass along these channels during  
20 cooking, and an array of channels such as this provides better overall circulation of hot air around the cookware. Secondly, this arrangement minimises contact between the cookware and the platter, thereby facilitating the removal of the cookware if the platter is dirty (e.g. with gooey cheese).

25 Not all the apertures need be surrounded by recesses.



The apertures may be recessed on both the upper and lower surfaces of the platter.

In the embodiment shown in Figure 2, an optional indentation 28 is formed in the centre of the upper surface of the platter. Within the indentation 28, its upper surface 29 is flat. This indentation is positioned such that an article of cookware placed therein is positioned in the optimum area in the oven chamber for microwave cooking, i.e. above the outlet of the waveguide. The indentation 28 may be circular, as shown in Figure 2, although other shapes such as squares and rectangles are also possible. Articles of cookware may advantageously be shaped to locate within the indentation 28. If the cooking program for a particular item of food only uses microwave cooking, then the user could be instructed to use such an article of cookware (e.g. by colour coding the cookware in correspondence with the cooking program) and to locate it in the indentation. This then ensures that the food is placed in the optimum position for microwave cooking, and the user does not place it over to one side on the platter where exposure to the microwave radiation would be less effective.

If the positioning of food is not critical, e.g. because both hot air and microwaves are being used, then an article of cookware larger than the indentation may be used, to span the indentation. Alternatively, the cookware may be placed on the platter aside from the indentation.

Figure 3 shows a close-up view of part of a platter 30 that is broadly the same as that shown in Figure 2. The horizontal member 32 is optional. This figure clearly shows the undulating upper surface of the platter and the recesses around the apertures.

Figure 4 shows a variant of the embodiment shown in Figures 2 and 3.

Figures 5 illustrates a second embodiment of a platter 50. Here, the apertures are arranged in an array of rows and columns. The apertures that form a row (e.g. 52, 54) are together  
5 surrounded by elongate recesses 56, 57 extending along the row on the upper surface of the platter. Such elongate recesses provide specific advantages. Firstly, they retain baguettes and long rolls that are placed directly on the platter, and prevent them from rolling around. Secondly, when cookware is placed on the platter, the elongate recesses form long unobstructed channels between the platter and the underside of the cookware, which  
10 promote the circulation of hot air within the oven.

The lower surface (underneath) of the platter is also profiled to incorporate elongate recesses surrounding a plurality of apertures, but these recesses 59 run at 90° to those on the upper surface. That is to say, whilst the recesses 56, 57 on the upper surface extend  
15 along rows of apertures, the recesses 59 on the lower surface extend along columns of apertures. This arrangement has been found to provide strength and flexural rigidity to the platter, and prevents undesirable flexing in use. It has also been found to prevent distortion of the platter during injection moulding, when being manufactured.

20 In this embodiment, the elongate recesses taper outwards towards the outer surfaces of the platter.

Figure 6 illustrates a variant of the platter of Figure 5. This platter 60 incorporates a central indentation 62 to receive an item of cookware to ensure it is placed in an optimum position  
25 for microwaving, as previously discussed with respect to Figure 1.

A platter may incorporate one or more vertically-extending members, to enable a plurality of platters to be stacked in use. Such a capability is particularly useful when cooking baguettes or rolls. Accordingly, one variant of the platter of Figure 5 includes vertically-extending members positioned around the edge of the platter, to enable a plurality of platters to be stacked. Another variant incorporates raised ridges between adjacent rows of apertures. The size and number of apertures in the platter, and the width of the elongate recesses (e.g. 56, 57) extending along the rows of apertures, may be varied to suit the cooking of different foodstuffs.

Figure 7 illustrates a platter 70 having no apertures in the central region, and a relatively large aperture 72, 74 on either side. It has been found that a sufficiently large aperture 72, 74 on either side of the platter enables the flow of hot air to pass through the oven chamber without any appreciable detriment to the cooking performance of the oven. This enables the central region of the platter to be devoid of apertures, thereby preventing food matter from falling through onto the base of the oven chamber.

The large apertures 72, 74 may alternatively be provided in the corners of the platter, although this is presently less preferred.

A raised rim 76, 78 extends around much of the perimeter of the platter, to retain food debris in use. The rim may extend around the entire of the edge of the platter (including the inner edge of the apertures 72, 74), thereby retaining substantially all the food debris that may fall.

In the embodiment shown in Figure 7, the platter 70 incorporates a plurality of recessed regions 82, 84, 86, 88, 90, 92 and 94, which serve to retain baguettes and rolls, and also provide pathways for the flow of air under items placed on the platter. These recessed regions are optional, and for some applications it may be desirable for the central region of the platter to be flat.

The platter 70 incorporates means 80 by which a handle may be attached to the platter.

The design illustrated in Figure 7 is particularly suitable for centre-injection-moulding. Since this platter does not incorporate holes, the polymer flow is not required to diverge and then re-converge during the moulding procedure, and hence the platter may be moulded without the formation of glassy join lines that may otherwise be formed when moulding an article that contains holes.

Although the platters described above have been described with respect to their use in commercial ovens (particularly forced air / microwave combination ovens), they are suitable for use in other types of ovens, including domestic and industrial ovens (including gas, electric, microwave and combination ovens).

#### Test results

A platter as described herein was used in conjunction with an article of cookware as described in our co-pending patent application entitled "Improved Cookware", to cook frozen pizza in a TurboChef C3 oven. The conventional cooking time for frozen pizza with this oven is 2.5 minutes. Remarkably, using a platter as described herein, and without changing the cooking temperature, the cooking time was reduced to 1.5 minutes, saving 40% of the

conventional cooking time. Thus, not only is the cooking process substantially expedited, but energy is also saved by virtue of the oven being operational for less time.

## CLAIMS

1. A platter for use in a forced air / microwave combination oven, the platter comprising an upper surface and a lower surface and incorporating a plurality of apertures  
5 passing through the thickness of the platter;  
wherein one or both of the surfaces of the platter incorporate a recess substantially surrounding at least one of the apertures.
2. A platter as claimed in Claim 1, wherein the upper surface is profiled such that each  
10 aperture is substantially surrounded by an individual recess.
3. A platter as claimed in Claim 2, wherein the recess tapers outwards towards the upper surface.
- 15 4. A platter as claimed in Claim 3, wherein adjacent tapering recesses meet at common points on the upper surface of the platter.
5. A platter as claimed in Claim 1, wherein the apertures are arranged in an array of rows and columns, and wherein the upper surface is profiled such that a plurality of  
20 apertures in a row are together substantially surrounded by an elongate recess extending along said row.
6. A platter as claimed in Claim 5, wherein the elongate recess tapers outwards towards the upper surface.

25

- (
7. A platter as claimed in Claim 5 or Claim 6, wherein the lower surface is profiled such that a plurality of apertures in a column are together substantially surrounded by an elongate recess extending along said column.
- 5 8. A platter as claimed in Claim 7, wherein the elongate recess tapers outwards towards the lower surface.
9. A platter as claimed in any preceding claim, wherein the upper surface further comprises one or more vertically-extending members.
- 10 10. A platter as claimed in Claim 9 when dependent on Claim 5, wherein the vertically-extending members are of the form of ridges between adjacent rows of apertures.
11. A platter as claimed in Claim 9 or Claim 10, wherein the height of the vertically-extending members is sufficient to enable a plurality of platters to be stacked in use in an oven.
- 15 12. A platter as claimed in any of Claims 1 to 11, further incorporating an indentation shaped to receive an item of cookware, the indentation being positioned to align the cookware with microwave radiation in the oven in use.
- 20 13. A platter as claimed in any of Claims 1 to 12, wherein the apertures are distributed over substantially the entire surface area of the platter.
- 25 14. A platter for use in an oven, the platter comprising:

a central region substantially devoid of apertures, and  
one or more apertures at substantially the edge of the platter, said one or  
more apertures passing through the thickness of the platter.

- 5 15. A platter as claimed in Claim 14, wherein said one or more apertures are positioned  
at the edge of the platter and are open-sided.
16. A platter as claimed in Claim 14 or Claim 15, further comprising one or more raised  
edge members around the perimeter of the platter for retaining food debris in use.
- 10 17. A platter as claimed in any of Claims 14, 15 or 16, further comprising means for  
attaching a handle.
18. A platter as claimed in any of Claims 14 to 17, further comprising handle means.
- 15 19. A platter as claimed in any of Claims 1 to 18, made of a polymer material.
20. A platter as claimed in Claim 19, wherein the polymer material is a liquid crystal  
polymer resin reinforced with glass.
- 20 21. A platter as claimed in any of Claim 19, made of DuPont (RTM) Zenite (RTM) 7130.
22. A platter for use in a forced air / microwave combination oven, wherein the platter  
incorporates an indentation shaped to receive an item of cookware, the indentation  
25 being positioned to align the cookware with microwave radiation in the oven in use.



23. A platter for use in a forced air / microwave combination oven, the platter incorporating apertures distributed over substantially the entire surface area of the platter.

5

24. A platter for use in an oven, the platter being made of a polymer material.

25. A platter as claimed in Claim 24, wherein the polymer material is a liquid crystal polymer resin reinforced with glass.

10



26. A platter as claimed in Claim 24, made of DuPont (RTM) Zenite (RTM) 7130.

27. An oven having a platter as claimed in any preceding claim.

15 28. A method of cooking using an oven having a platter as claimed in any of Claims 1 to 26.

20 29. A method of cooking as claimed in Claim 28 when dependent on Claims 12 or 22, further comprising using an article of cookware shaped to correspond with the shape of the indentation, and locating said article of cookware in the indentation.

30. A platter for use in an oven substantially as herein described with reference to and as illustrated in any combination of the accompanying drawings.

- 
- 
31. A method of cooking using an oven substantially as herein described with reference to and as illustrated in any combination of the accompanying drawings.

## ABSTRACT

### IMPROVED PLATTER

5

A platter for use in a forced air / microwave combination oven, the platter comprising an upper surface and a lower surface and incorporating a plurality of apertures passing through the thickness of the platter; wherein one or both of the surfaces of the platter incorporate a recess substantially surrounding at least one of the apertures. The invention also provides a  
10 platter incorporating an indentation shaped to receive an item of cookware, the indentation being positioned to align the cookware with microwave radiation in the oven in use. Additionally, the invention provides a platter incorporating apertures distributed over substantially the entire surface area of the platter, and also a platter comprising a central region substantially devoid of apertures, and one or more apertures at substantially the edge  
15 of the platter. Preferably the platter is made of a polymer material, particularly preferably a liquid crystal polymer resin such as DuPont (RTM) Zenite (RTM) 7130. Also provided is a method of cooking using such a platter.

(Figure 2 to accompany abstract.)

1/6

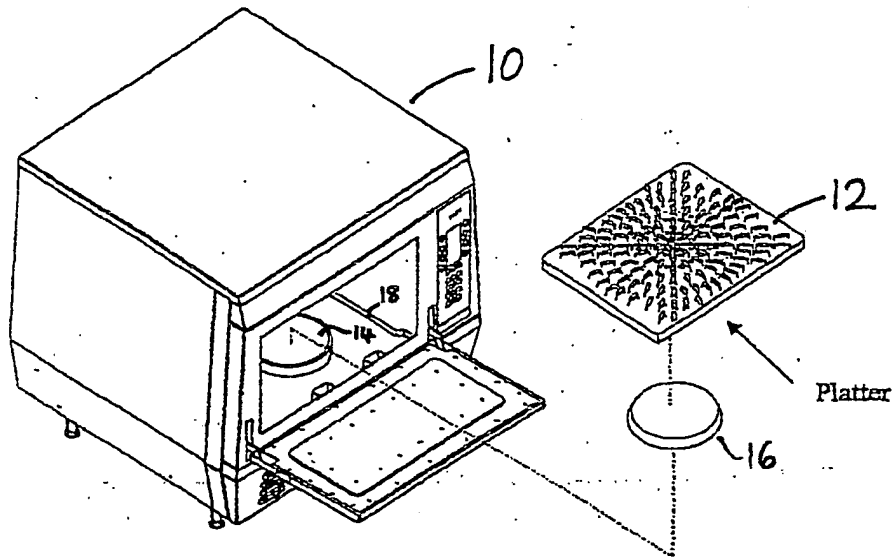


FIGURE 1

2/6

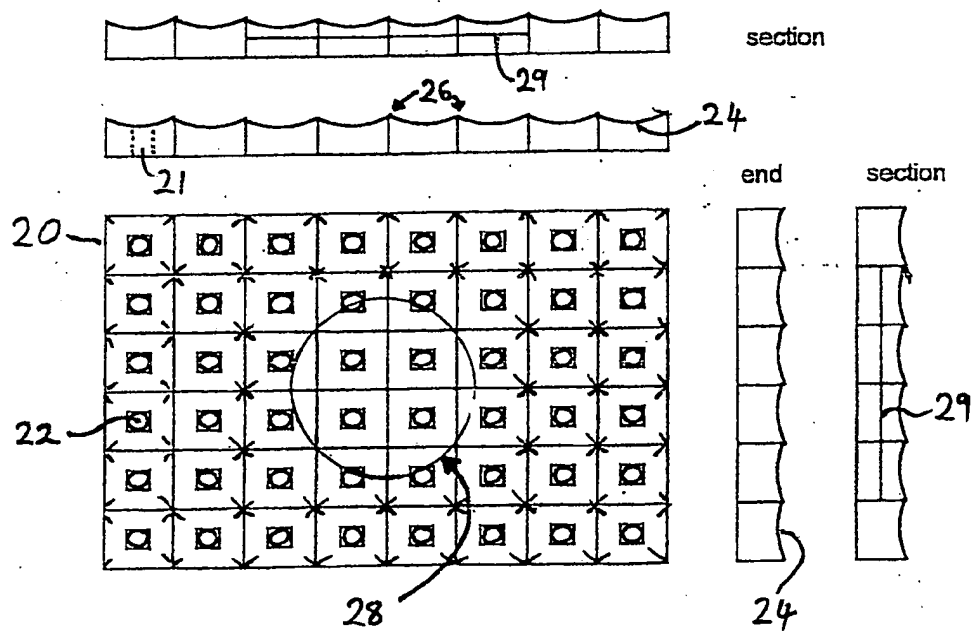


FIGURE 2

3/6

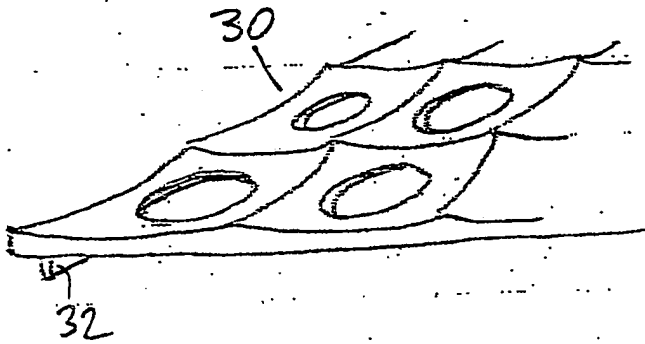


FIGURE 3

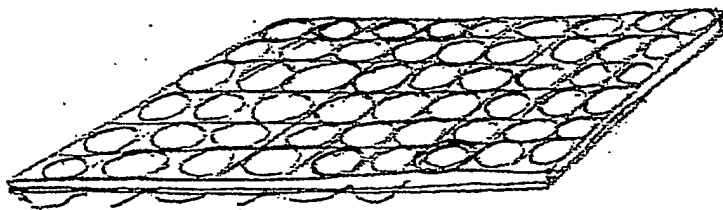


FIGURE 4

4/6




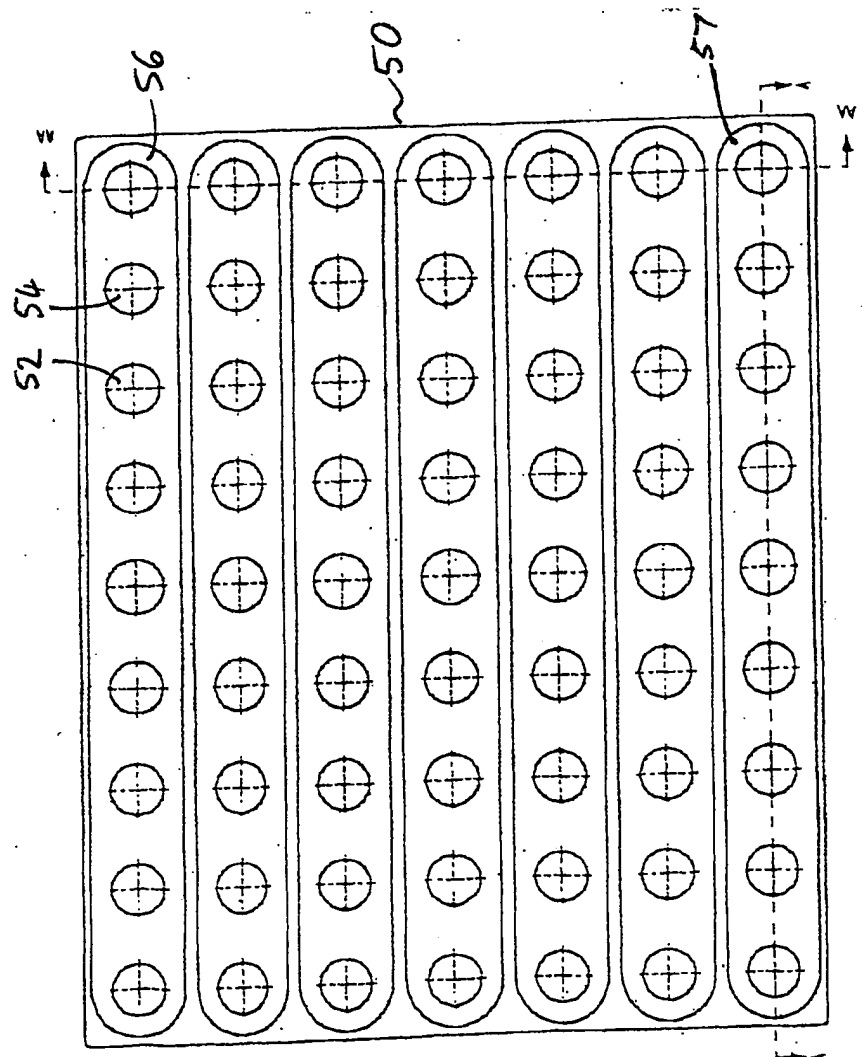


FIGURE 5

5/6

FIGURE 6

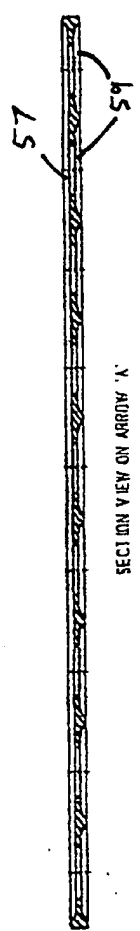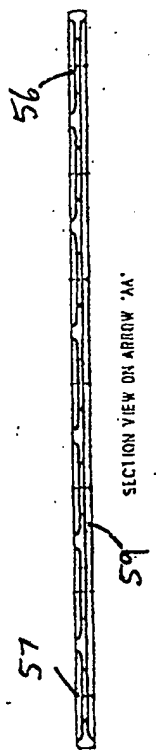

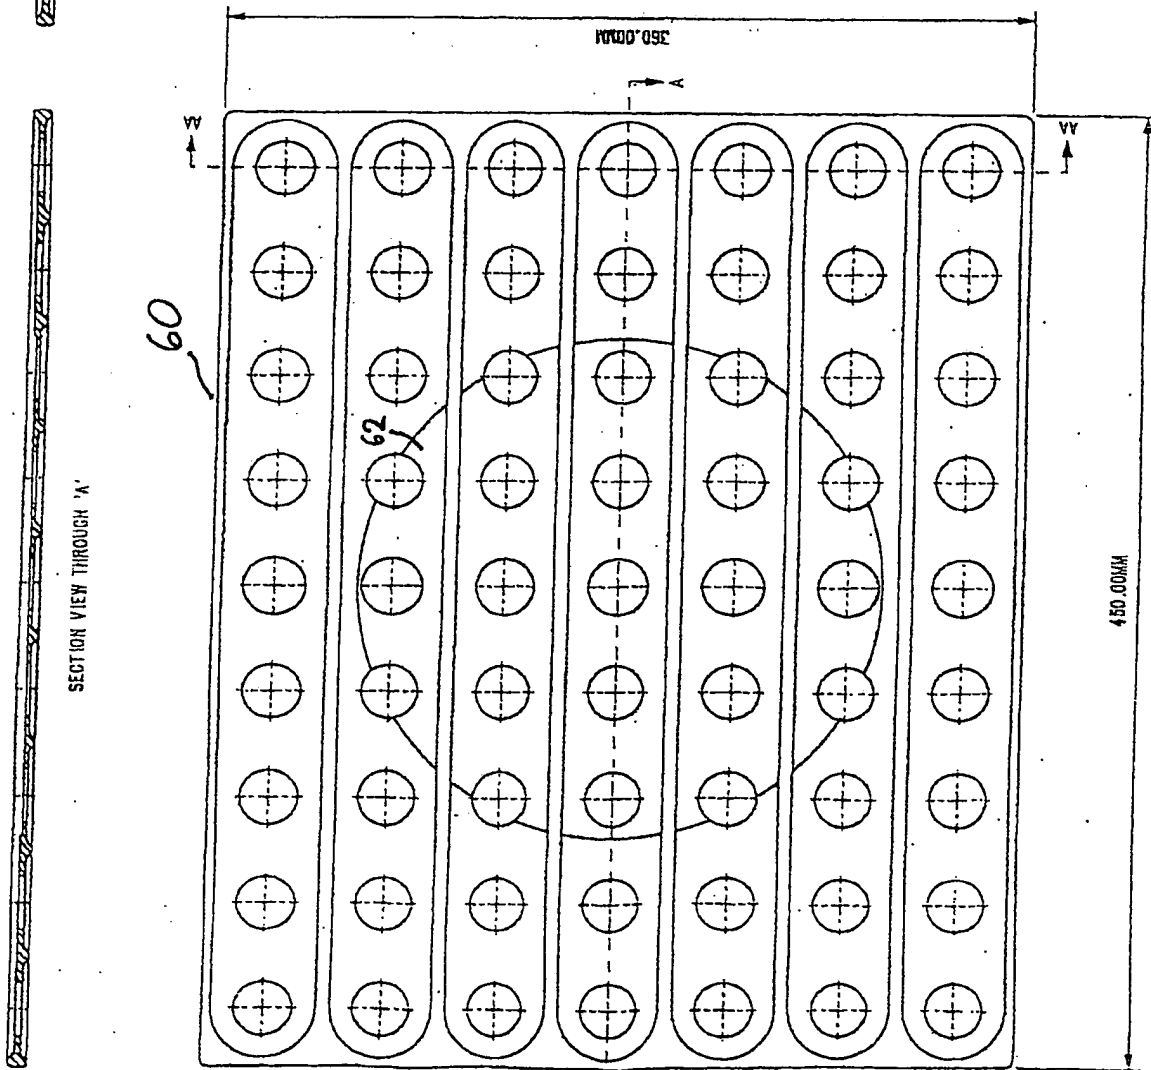

6/6

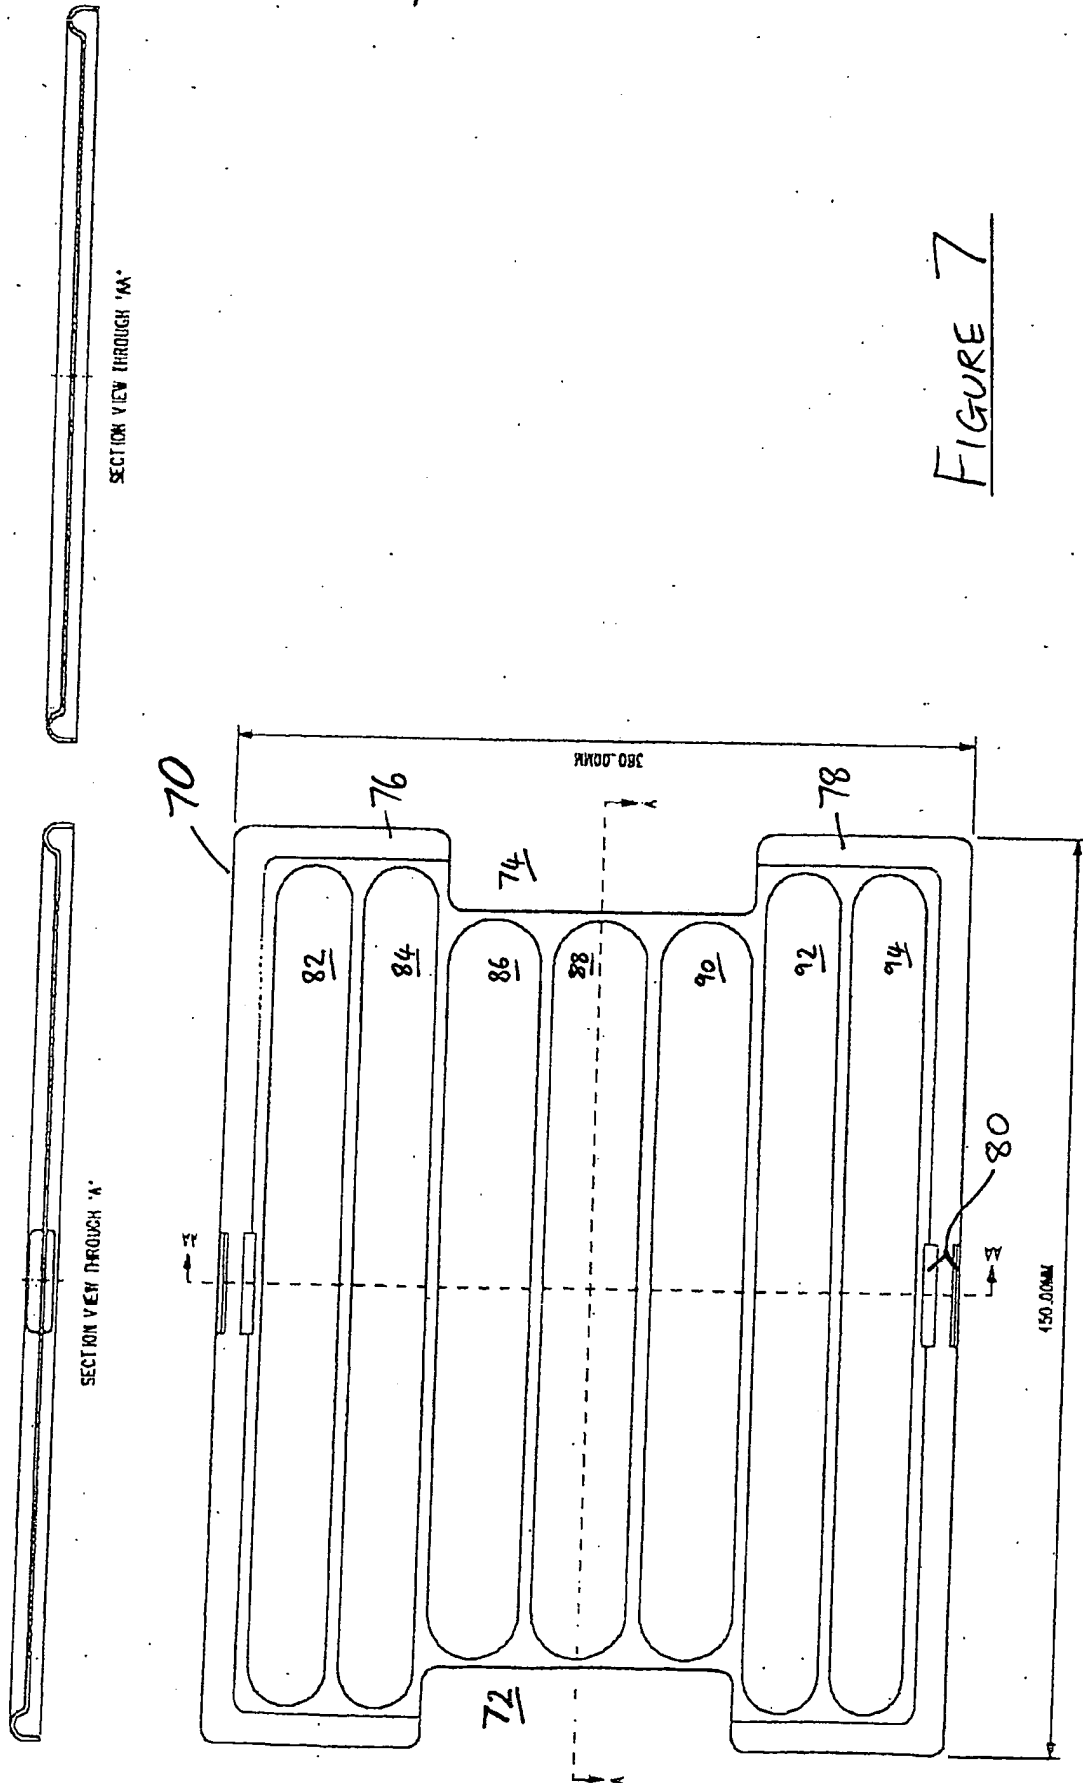


FIGURE 7